SHEET
A-401

PARTITION & DRYWALL PLAN (2-5)

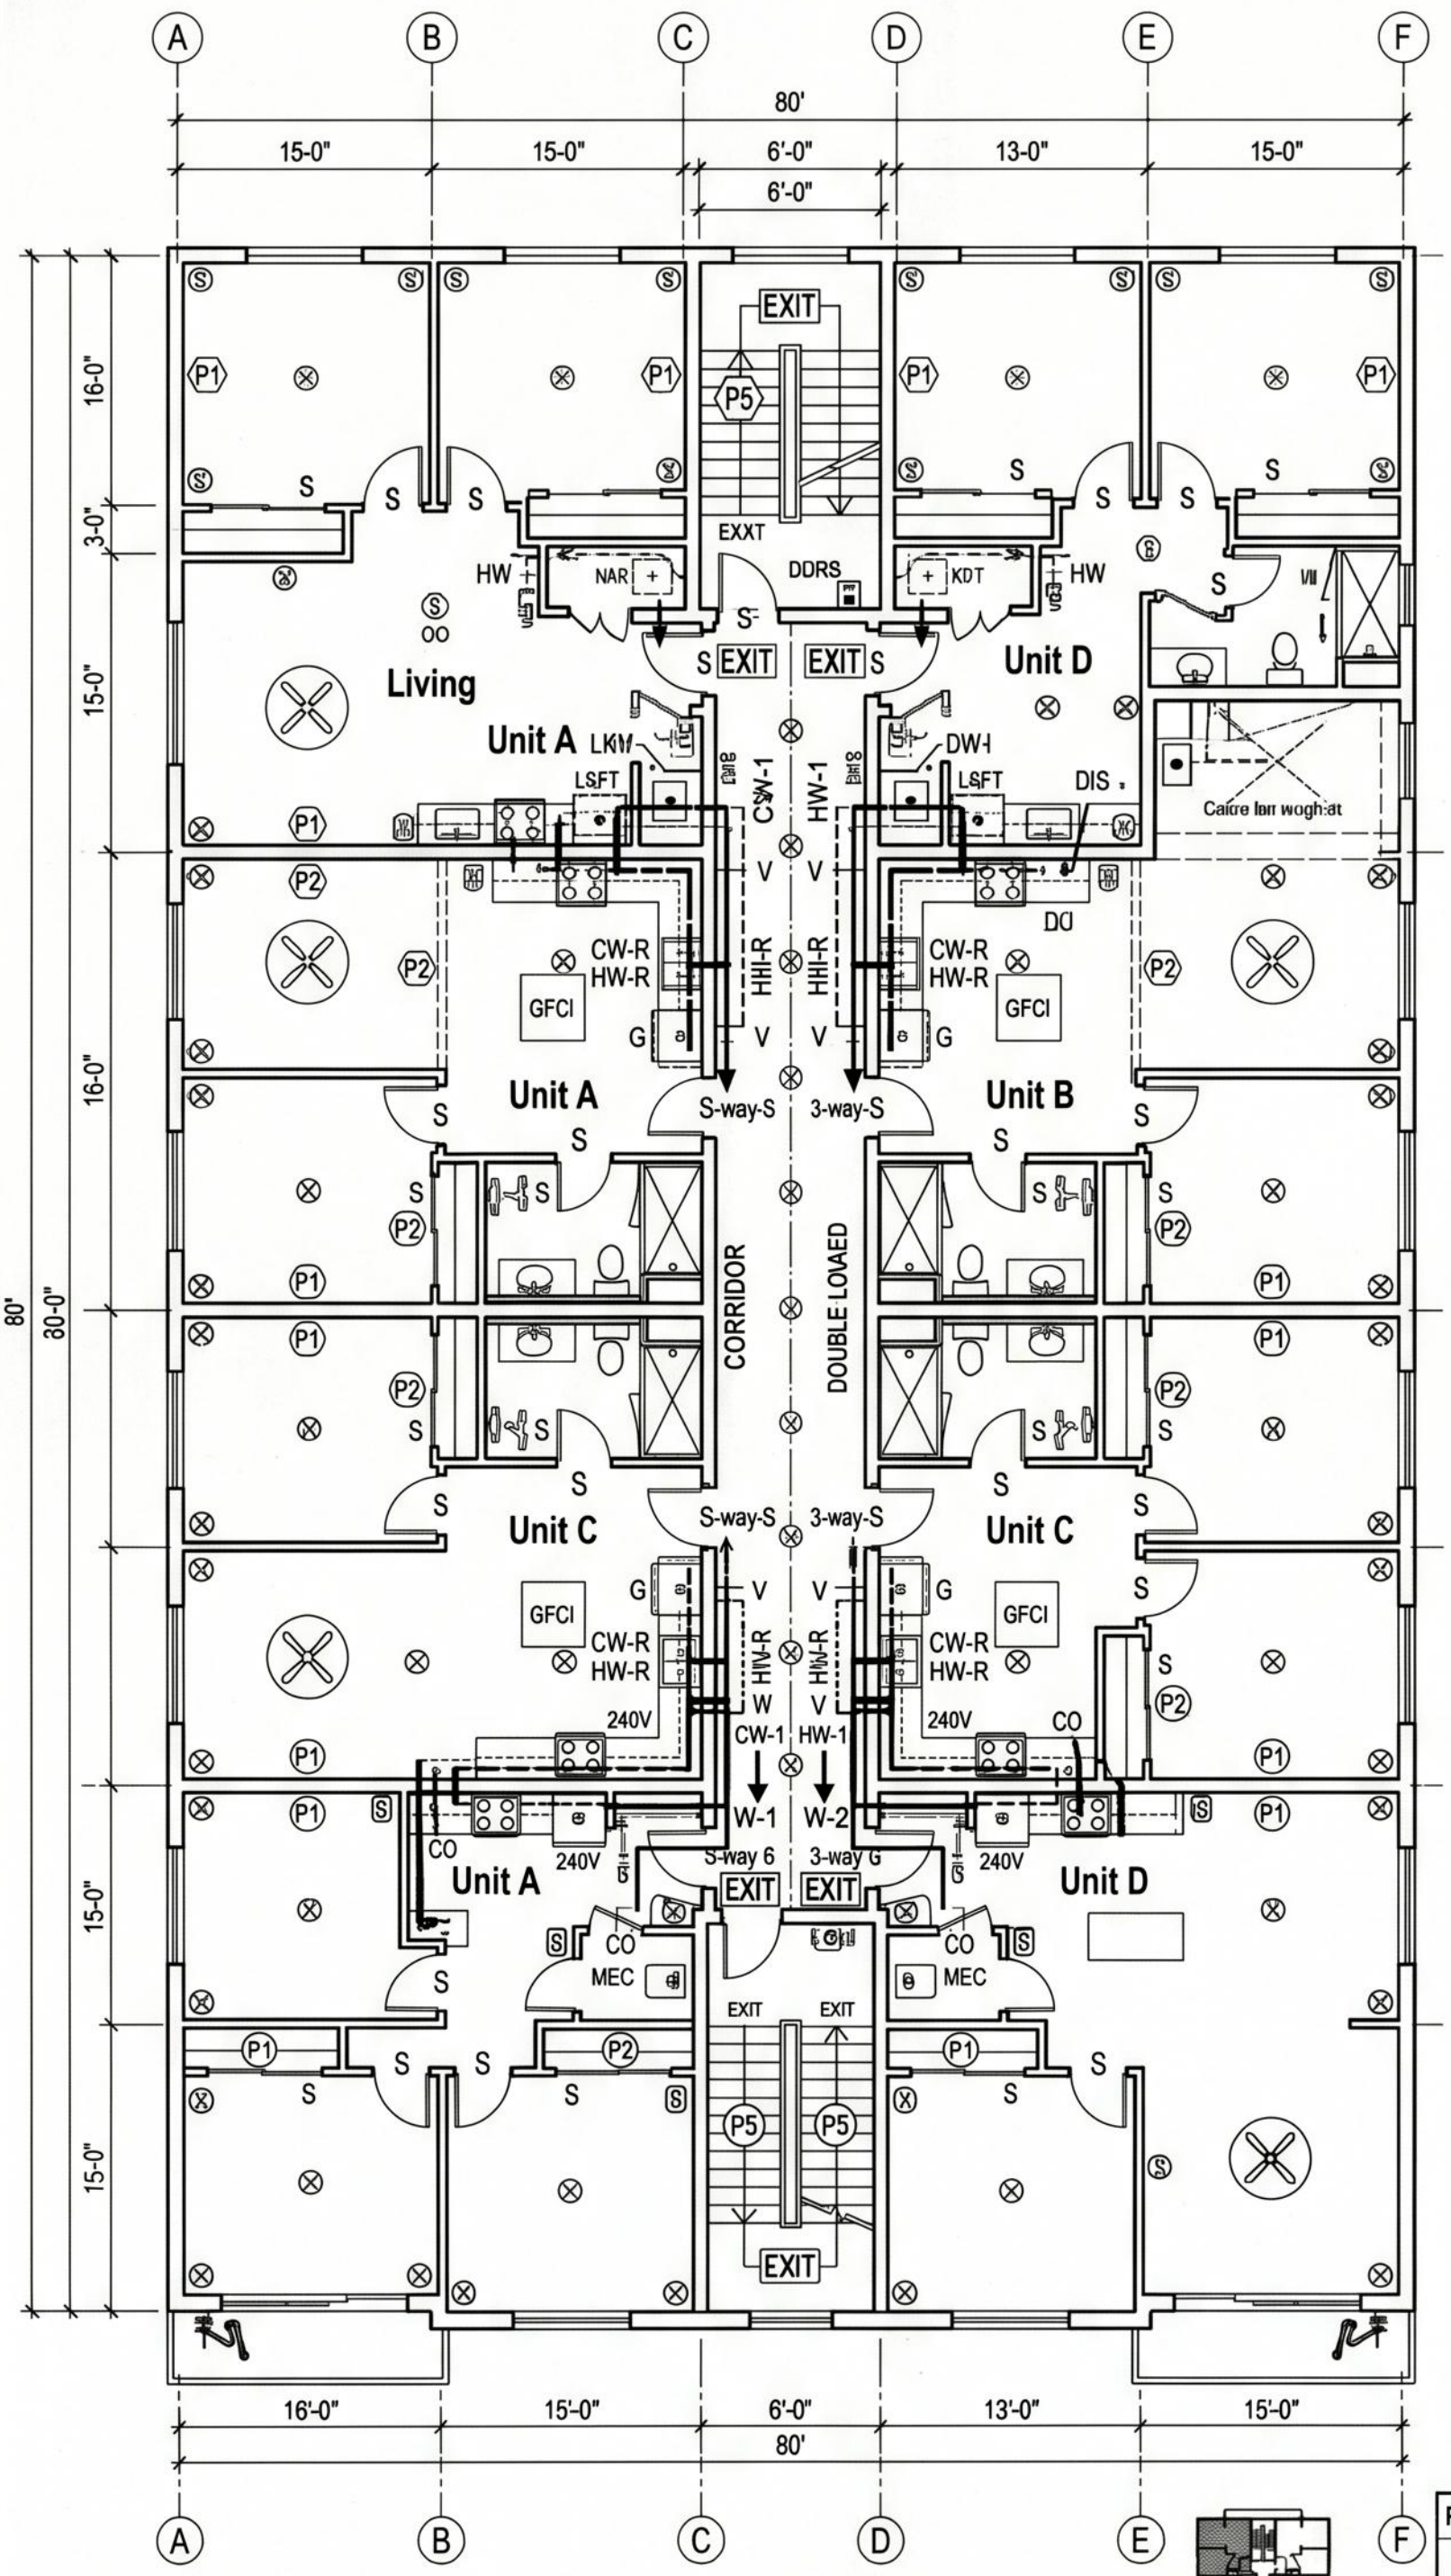

N

WALL-TYPE SCHEDULE LEGEND

- P1 — 5/8 "' Type X gyp. bd. each side of 3-5/8 " metal studs @ 16 in o.c., R-13 batt insulation, alrinar (inter-unit, 1-hour rated, STC 50)
- P2 — 1/2 "' gyp. bd. each side of 3-5/8" metal studs @ 16 inch o.c., R-13 batt (interior unit part.)
- P3 — 5/8 "' Type X gyp. bd. tenant side, 5/8 "' shaftwall corridor side over 2-1/2 " CH studs (corridor walls, 1-hour rated)
- P4 — cement-board on stud (wet walls @ tubs/showers)
- P5 — 2 layers 5/8 ", Type X each side over 6 "' metal studs (stair shaft, 2-hour rated)

DOOR SCHEDULE STRIP

DOOR TAG	TYPE	DIM.	MATERIAL
D-201	HCD	3'-0"37'-0"	WD/HM
D-202	HCD	3'-0"47'-0"	WD/HM
D-203	HCD	3'-0"37'-0"	WD/HM
D-204	HCD	3'-0"47'-0"	WD/HM
D-205	HCD	3'-0"37'-0"	WD/HM
D-206	HCD	3'-0"47'-0"	WD/HM
D-207	HCD	3'-0"37'-0"	WD/HM
D-208	HCD	3'-0"47'-0"	WD/HM
D-209	HCD	3'-0"47'-0"	WD/HM
D-210	HCD	3'-0"47'-0"	WD/HM
D-211	HCD	3'-0"37'-0"	WD/HM
D-212	HCD	2'-0"47'-0"	WD/HM
D-214	HCD	3'-0"47'-0"	WD/HM
D-215	HCD	2'-0"47'-0"	WD/HM
D-216	HCD	3'-0"37'-0"	WD/HM
D-217	HCD	2'-0"47'-0"	WD/HM
D-218	HCD	3'-0"37'-0"	WD/HM
D-219	HCD	2'-0"47'-0"	WD/HM
D-220	HCD	3'-0"37'-0"	WD/HM

GENERAL NOTES:

- Wall heights run to underside of structure unless otherwise noted.

1/4" = 1'-0"

(A) PARTITION & DRYWALL PLAN —

80 ft x 65 ft

KEY PLAN

PACIFIC COAST ARCHITECTS PLLC

EVERGREEN TERRACE RESIDENCES
742 EVERGREEN TERRACE
SEATTLE WA 98101

PROJECT NO. 23-CTR-091

ISSUED FOR CONSTRUCTION 04.26.2025

SHEET A-401 — PARTITION AND DRYWALL PLAN – TYPICAL FLOOR

24x36" henter